

Glasvezelversterkte polyamide TL armaturen Ex de Glass fiber reinforced polyester TL lighting fixtures Ex de

Technische informatie:

Ex marking: II 2G Ex deq IIC T4
 II 2D Ex DIP A21 Ta T120°C
 Geschikt voor zone 1, 2, 21 en zone 22
 Omgevingstemperatuur: -25°C tot +40°C
 Beschermingsgraad: IP65
 Spanning: 230 VAC - 50/60Hz
 Lamphouder: Bi-pin - G13
 Kabelingen: 3xM25
 Aansluitingen: 4 mm
 Materiaal behuizing: glasvezelversterkt polyester
 Materiaal kap: polycarbonaat

Uitvoering met batterij tbv noodverlichting:
 Laadtijd: 24 uur
 Noodverlichting duur: >120 min.

Conform de standards: EN60079

Technical data:


Ex mark: II 2G Ex deq IIC T4
 II 2D DIP A21 Ta T120°C
 Can be used in zone 1, 2, 21 and zone 22
 Ambient temperature range: -25°C to +40°C
 Degree of protection: IP65
 Voltage: 230 VAC - 50/60Hz.
 Lampholder: Bi-pin - G13
 Cable entries: 3xM25
 Connections: 4 mm
 Material body: glas fibre reinforced polyester
 Material cover: polycarbonate

Version with battery for emergency lighting
 Charging time: 24 hour
 Emergency light duration: > 120 min.


Meets the standards: EN60079

Afbeelding Illustration	Vermogen Power	Lumen	Gewicht Weight	Type
	2 x 18W - 0.2 A	2086	5.0 kg	Z0865 / 218
	2 x 36W - 0.4 A	4450	7.9 kg	Z0866 / 236
	2 x 18W - 0.2 A Emergency -1x18W	2059	6.8 kg	Z0865 / 218-YJ
	2 x 36W - 0.4 A Emergency -1x36W	4515	9.9 kg	Z0866 / 236-YJ




Lichtkarakteristiek Polar curves

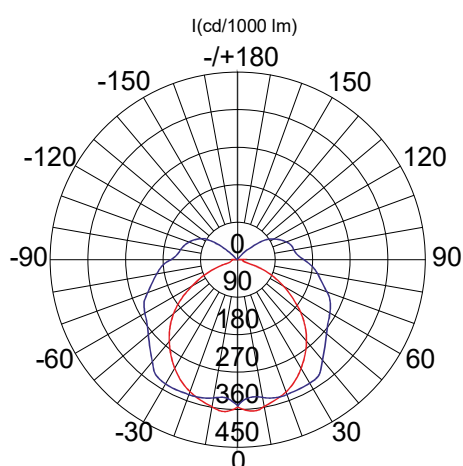

type Z0865 - 2 x 18 Watt


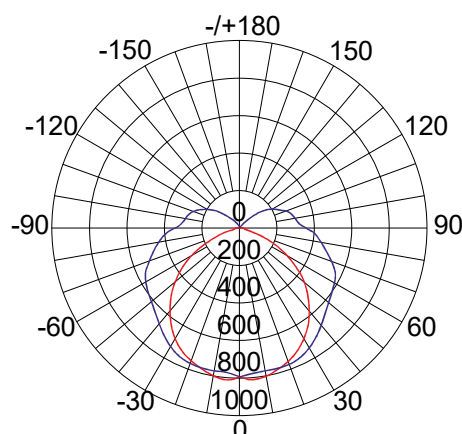


type Z0866 - 2 x 36 Watt


Afbeelding Illustration	Omschrijving Description	Materiaal Material	Type
	Plafondbeugel Ceiling bracket	Gegalvaniseerd staal / Galvanized steel RVS 304 / Stainless Steel 304	D621
	Draadeind M6 / Pendant M6	Gegalvaniseerd staal / Galvanized steel	D622
	M8 oogbout met ketting M8 ring bolt with chain	Geplastificeerd staal / Plastic covered steel	D623
	Wandbeugel / Wall bracket	Gegalvaniseerd staal / Galvanized steel	D624
 Pijpbeugel Pipe clamp	Pijp/pipe 1 1/4" = 42 ~ 45mm	Gegalvaniseerd staal / Galvanized steel RVS 304 / Stainless Steel 304	J200
	Pijp/pipe 1 1/2" = 47 ~ 50mm	Gegalvaniseerd staal / Galvanized steel RVS 304 / Stainless Steel 304	J200/304
	Pijp/pipe 2" = 59 ~ 62mm	Gegalvaniseerd staal / Galvanized steel RVS 304 / Stainless Steel 304	J300
	Pijp/pipe 2" = 59 ~ 62mm	Gegalvaniseerd staal / Galvanized steel RVS 304 / Stainless Steel 304	J300/304
	M8/SW13 Sleutel M8/SW13 Key spanner	Messing / Brass	J400
	Veiligheidsschakelaar Safety switch		J400/304
	Batterij / Battery 3,0Ah/7,2V - 1x30W	Voor noodverlichting 1x30W LED For emergency fixture 1x30W LED	D601
	Batterij / Battery 4,5Ah/7,2V - 2x36W	Voor noodverlichting 2x36W + 2x30W LED For emergency fixture 2x36W + 2x30W LED	Z0207-1
	Indicatie module / Indication module	Voor noodverlichting For emergency fixture	Z0819/3.0
	Zekering / Fuses	Zie hoofdstuk B See chapter B	Z0819/4.5
			Z0819/0802/1
			Z0804/T ... A

Afmetingen


Dimensions

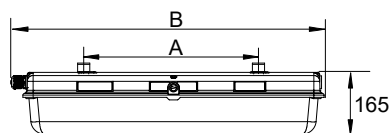


Montage met
wandbeugel
Mounting with
wall bracket




	Z0865	Z0866	Z0875	Z0876
A	400 mm.	800 mm.	400 mm.	800 mm.
B	725 mm.	1335 mm.	725 mm.	1335 mm.

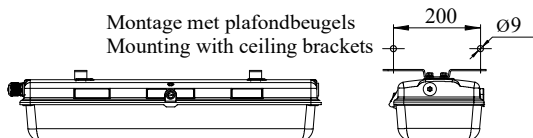


Montage met plafondbeugels
Mounting with ceiling brackets

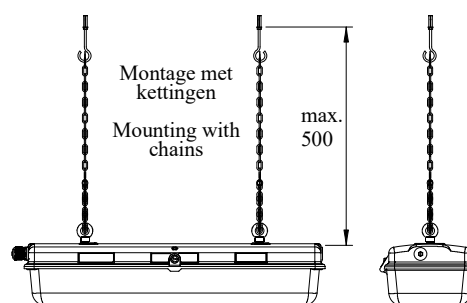

Montage met
kettingen
Mounting with
chains

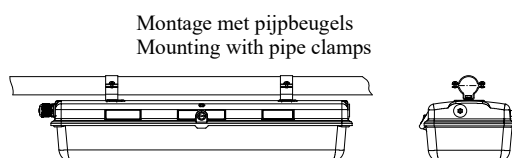

Montage met pijpbeugels
Mounting with pipe clamps

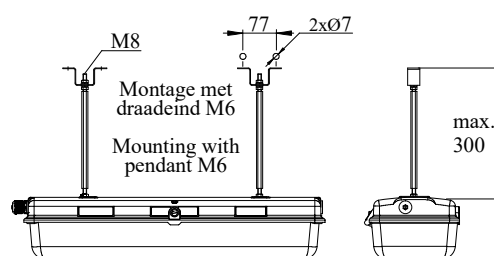

Montage met
draadeind M6
Mounting with
pendant M6